


2VSH | AR | PLATE FIXING


BLACK RUBBER TYRED WHEELS WITH ALUMINIUM CENTRE

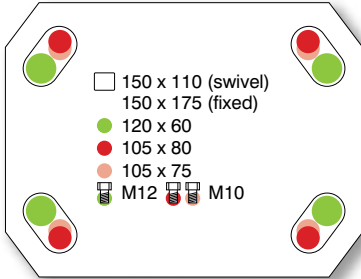

	wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + total-stop brake
P	100	40 x 2	166	42	230	ball	2VSH 100 ARJ P06	2VFH 100 ARJ P06	
P	125	50 x 2	192	45	300	ball	2VSH 125 ARJ P06	2VFH 125 ARJ P06	
P	150	50 x 2	217	49	400	ball	2VSH 150 ARJ P06	2VFH 150 ARJ P06	
P	200	50 x 2	267	54	550	ball	2VSH 200 ARJ P06	2VFH 200 ARJ P06	
P	250	50 x 2	318	70	800	ball	2VSH 250 ARJ P06	2VFH 250 ARJ P06	

2VSH | AP | PLATE FIXING

POLYURETHANE TYRED WHEELS WITH ALUMINIUM CENTRE

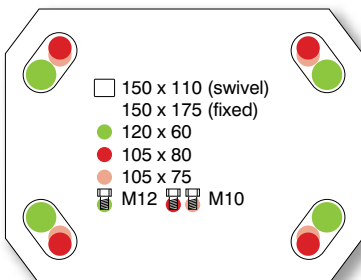

	wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + total-stop brake
P	100	50 x 2	166	42	475	ball	2VSH 100 APJ P06	2VFH 100 APJ P06	
P	125	50 x 2	192	45	575	ball	2VSH 125 APJ P06	2VFH 125 APJ P06	
P	150	50 x 2	217	49	700	ball	2VSH 150 APJ P06	2VFH 150 APJ P06	
P	200	50 x 2	267	54	1050	ball	2VSH 200 APJ P06	2VFH 200 APJ P06	



4-WAY DIRECTIONAL LOCK for straight line travel

Supplied separately, order ref VSHDLKIT

P Preferred range product, see page 1 for details

i All dimensions are in **mm** and all loadings are in **kg** unless otherwise stated