


## 2VSH | PT | PLATE FIXING

POLYURETHANE TYRED WHEELS WITH CAST IRON CENTRE



	wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + total-stop brake
<span style="border: 1px solid green; border-radius: 50%; padding: 2px;">P</span>	100	50 x 2	166	42	500	ball	<b>2VSH 100 PTJ P06</b>	<b>2VFH 100 PTJ P06</b>	
<span style="border: 1px solid green; border-radius: 50%; padding: 2px;">P</span>	125	50 x 2	192	45	600	ball	<b>2VSH 125 PTJ P06</b>	<b>2VFH 125 PTJ P06</b>	
<span style="border: 1px solid green; border-radius: 50%; padding: 2px;">P</span>	150	50 x 2	217	49	1050	ball	<b>2VSH 150 PTJ P06</b>	<b>2VFH 150 PTJ P06</b>	
<span style="border: 1px solid green; border-radius: 50%; padding: 2px;">P</span>	200	50 x 2	267	54	1400	ball	<b>2VSH 200 PTJ P06</b>	<b>2VFH 200 PTJ P06</b>	
<span style="border: 1px solid green; border-radius: 50%; padding: 2px;">P</span>	250	50 x 2	318	70	1800	ball	<b>2VSH 250 PTJ P06</b>	<b>2VFH 250 PTJ P06</b>	

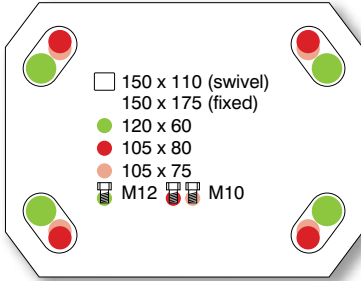

4-WAY DIRECTIONAL LOCK for straight line travel

Supplied separately, order ref **VSHDLKIT**

P Preferred range product, see page 1 for details

i All dimensions are in **mm** and all loadings are in **kg** unless otherwise stated