


## VSH | EAP | PLATE FIXING


'ERGONOMIC' CROWN TREAD POLYURETHANE TYRED WHEEL WITH ALUMINIUM CENTRE

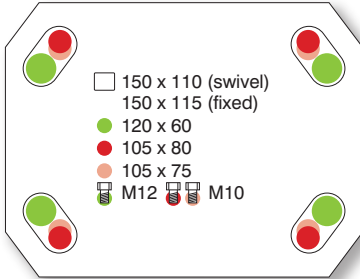

wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + brake
100	45	152	34	300	ball	VSH 100 EAPJ P06	VFH 100 EAPJ P06	VSH 100 EAPJ P06 SWB
125	45	177	45	350	ball	VSH 125 EAPJ P06	VFH 125 EAPJ P06	VSH 125 EAPJ P06 SWB
150	45	202	49	450	ball	VSH 150 EAPJ P06	VFH 150 EAPJ P06	VSH 150 EAPJ P06 SWB
200	45	252	54	520	ball	VSH 200 EAPJ P06	VFH 200 EAPJ P06	VSH 200 EAPJ P06 SWB

## VSH | PT | PLATE FIXING

POLYURETHANE TYRED WHEEL WITH CAST IRON CENTRE

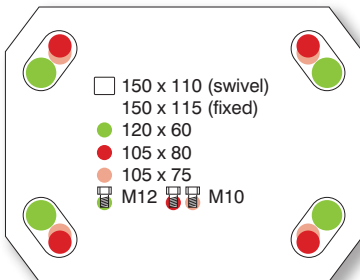

wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + brake
100	49	152	34	350	ball	VSH 100 PTJ P06	VFH 100 PTJ P06	VSH 100 PTJ P06 SWB
125	50	177	45	450	ball	VSH 125 PTJ P06	VFH 125 PTJ P06	VSH 125 PTJ P06 SWB
150	50	202	49	800	ball	VSH 150 PTJ P06	VFH 150 PTJ P06	VSH 150 PTJ P06 SWB
200	50	252	54	1000	ball	VSH 200 PTJ P06	VFH 200 PTJ P06	VSH 200 PTJ P06 SWB
250	50	303	70	1300	ball	VSH 250 PTJ P06	VFH 250 PTJ P06	VSH 250 PTJ P06 SWB



4-WAY DIRECTIONAL LOCK for straight line travel

To suit all swivel castors except with total-stop brake

Supplied separately, order ref **VSHDLKIT**

**i** All dimensions are in **mm** and all loadings are in **kg** unless otherwise stated